



### 3FM1.3 (6V1.3Ah)

**KYAIYING®** Standard battery is design for a general purpose by KaiYing Power. 3FM1.3 is a general purpose battery up to 5 years in star service . As with all **KYAIYING®** batteries, all are rechargeable highly efficient, leak proof and maintenance free.




**Specifications:**

Cells per Unit	3
Normal Voltage	6V
Capacity	1.3Ah@20hr-rate to 1.75V per cell@25°C
Weight	Approx.( 0.28±3%kg)
Maximum Discharge Current	13A(5sec)
Internal Resistance	Approx. 50mΩ full charged @25°C
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Nominal Operating Temperature Range	25°C±3°C
Float Charging Voltage	6.75~6.90VDC/unit Average @25°C
Maximum Charging Current	0.39A
Equalization and Cycle Service	7.20V~7.50VDC/unit Average @ 25°C
Self Discharge	KYAIYING Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	F1
Container Material	ABS(UL94-HB) *Flammability resistance of (UL94-V0) can be available upon request



**Dimensions: L97\*W24\*H51.5(TH57)mm**

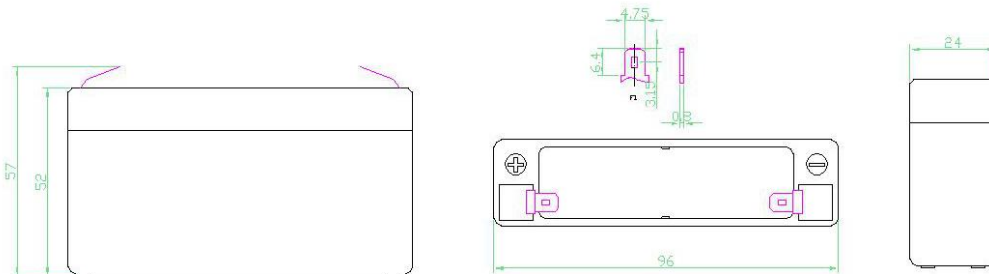


**Constant Current Discharge Characteristics (A, 25 °C)**

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80	5.49	3.72	2.87	1.40	0.83	0.46	0.34	0.21	0.14	0.12	0.07
4.95	5.32	3.57	2.82	1.33	0.81	0.46	0.34	0.21	0.14	0.12	0.07
5.10	5.21	3.53	2.73	1.32	0.80	0.46	0.34	0.21	0.13	0.11	0.065
5.25	5.05	3.42	2.61	1.26	0.77	0.45	0.33	0.20	0.13	0.11	0.065
5.40	4.90	3.32	2.59	1.26	0.76	0.45	0.33	0.20	0.13	0.11	0.06


**Constant Power Discharge Characteristics (Watt, 25 °C)**

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80	28.5	19.5	15.3	7.56	4.52	2.57	2.17	1.45	0.80	0.73	0.37
4.95	27.6	18.9	14.8	7.34	4.38	2.54	2.15	1.44	0.80	0.73	0.37
5.10	27.0	18.5	14.6	7.26	4.34	2.53	2.14	1.43	0.80	0.72	0.36
5.25	26.2	17.9	14.0	6.96	4.15	2.50	2.12	1.42	0.79	0.72	0.36
5.40	25.4	17.4	13.9	6.90	4.12	2.48	2.10	1.40	0.79	0.72	0.36


**Float Service Life**

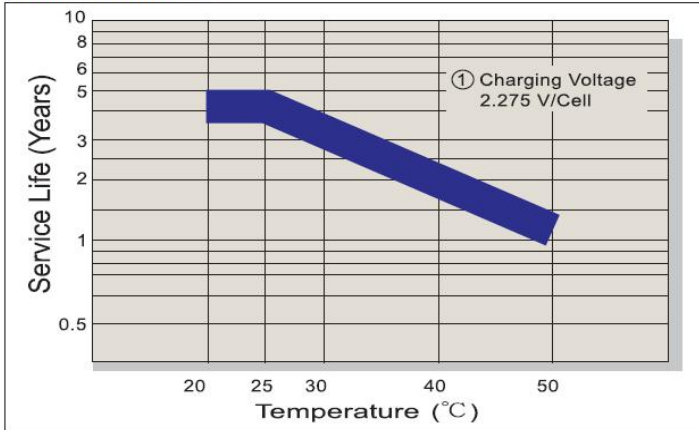


**Capacity Retention Characteristic**

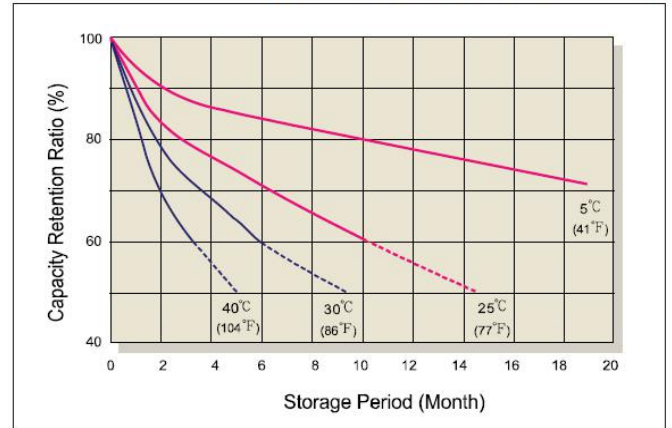


**Battery Voltage and Charge Time for Standby use**

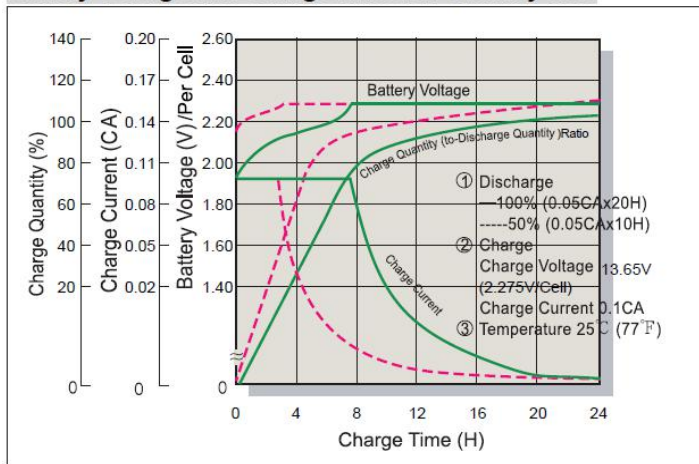


**Cycle Service Life**

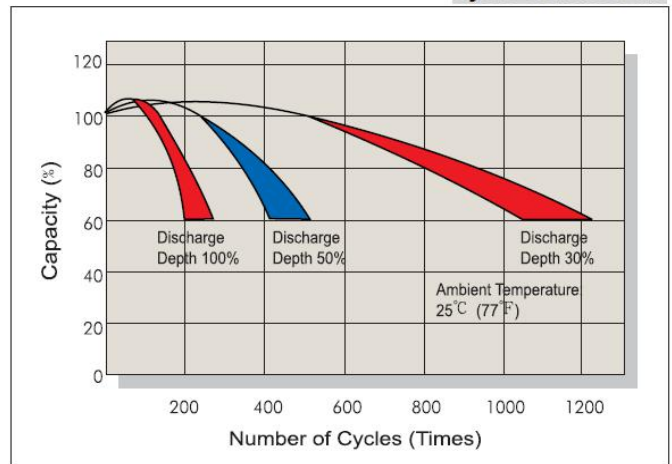

**Battery Voltage and Charge Time for Cycle Use**

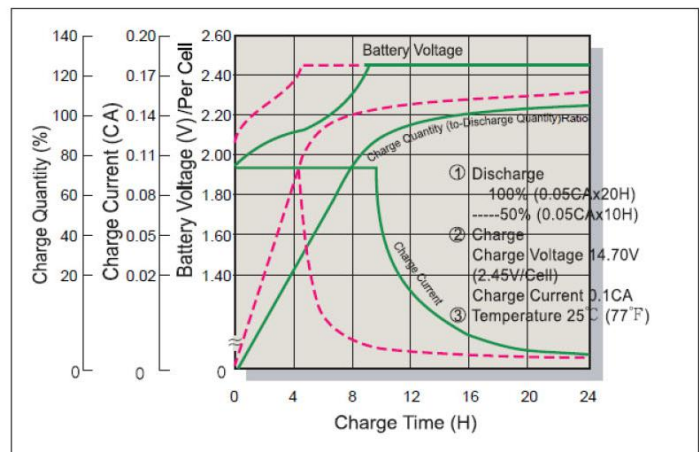

**Terminal Voltage (V) and Discharge Time**

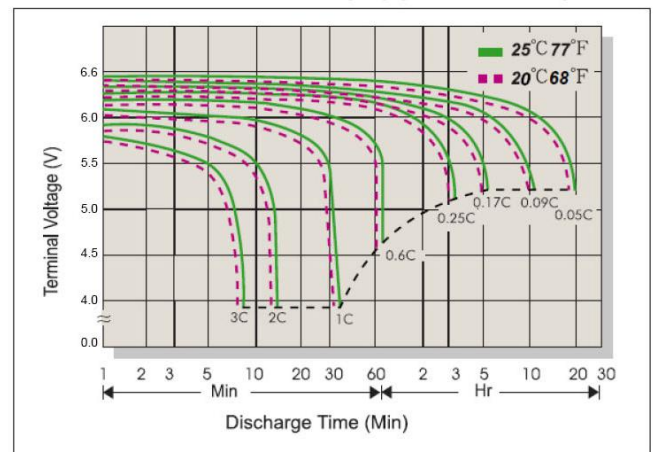

**Charging Procedures**

Application	Charge Voltage(V/cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.3C
Standby	25°C(77°F)	2.275	2.25~2.30	

**Discharge Current VS. Discharge Voltage**

Final Discharge Voltage V/cell	1.75	1.70	1.65	1.60
Discharge Current (A)	0.2C>(A)	0.2C<(A)	0.5C<(A)	(A)>1.0C
	<0.5C	<0.5C	<1.0C	

KaiYing Power Supply & Electrical Equip Co., Ltd.

Address: KaiYing Industrial Park, ChengXiang Town, Anxi, Quanzhou, Fujian China